



В




1

FOR FOOTING DETAILS \$ ΕE DRAWING NO: 03008-07

Α




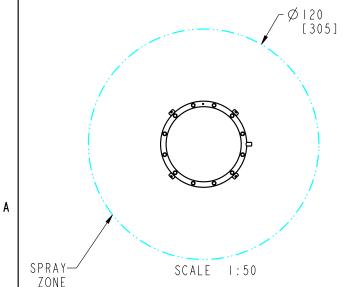

FLOW	RATE	ΑТ	5	PSI	LOW	NORMAL	HIGH
GPM-[LPM]					24[96]	36[44]	48[192]

- I STRUCTURE: TYPE 304 STAINLESS STEEL NOZZLE: BRASS WITH TAMPER RESISTANT FEATURES
- 2- FINISH: NO COATING
- 3- PRODUCT INCLUDES: ANCHOR BOLTS WITH HARDWARE AND FOOTING TEMPLATE SPRAY NOZZLES WINTER NOZZLE CAPS SERVICE TOOLS TAMPER RESISTANT HARDWARE
- 4- BOND COMPONENT WITH #6 BARE COPPER WIRE
- 5 PRODUCT COMPLIANCE: MEETS ADA ACCESSIBILITY GUIDELINES MEETS CURRENT ASTM F1487 SAFETY STANDARDS

NIRBO	
AQUATIC INC.	




ALL INFORMATION CONTAINED IN THIS DOCUMENT IS PROPERTY OF NIRBO AQUATIC INC. AND MAY NOT BE REPRODUCED OR COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.

DATE (yyyy.mm.dd) 2013.10.30		LIQUID JAIL	
	SHEET	DRAWING NO	REV
1 N C H [C M]	1/2	03130-01-015	Λ I

2

В

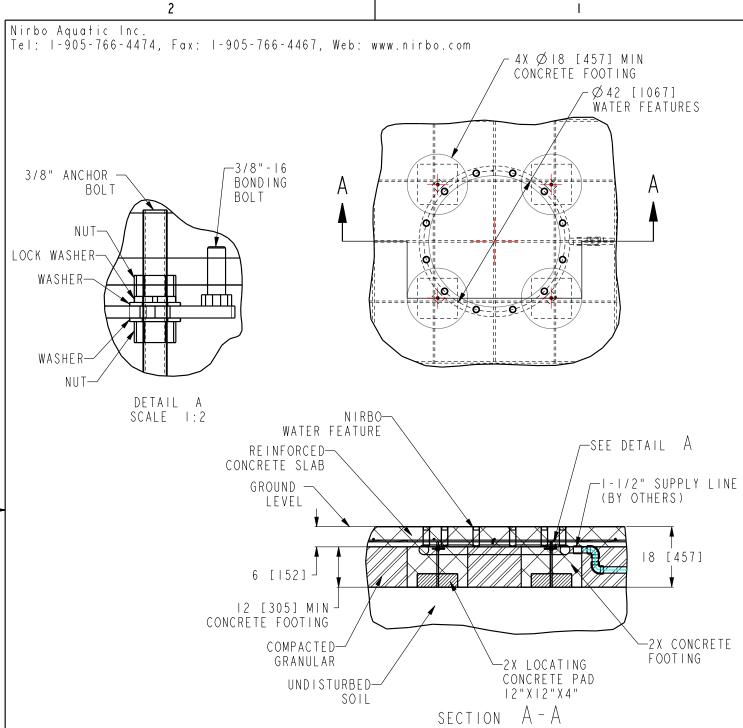

NOTES:

В

- I- FOLLOW LOCAL CODES, WHEREVER APPLICABLE.
- 2- GRANULAR BASE THICKNESS SHALL MEET LOCAL BUILDING CODE REQUIREMENTS.
- 3- WATER SUPPLY LINE SHALL BE INSTALLED PER LOCAL BUILDING CODES.
- 4- HARDWARE SUPPLIED BY MANUFACTURER SHALL BE USED.

NIRBO AQUATIC INC. ALL INFORMATION CONTAINED IN THIS DOCUMENT IS PROPERTY OF NIRBO AQUATIC INC. AND MAY NOT BE REPRODUCED OR	DATE (yyyy.mm.dd) 2019.09.03	I N	STALLATION, GROUND FEAT	URE
COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.	INCH [mm]	SHEET	DRAWING NO 0 3 0 0 8 - 0 7	REV 03

2