



1

В





FLOW (5-10 PSI)	LOW	NOMINAL	HIGH
GPM-[LPM]	24[96]	30[44]	45[180]

- I STRUCTURE: TYPE 304 STAINLESS STEEL NOZZLE: BRASS WITH TAMPER RESISTANT FEATURES
- 2- FINISH: NONE
- 3- PRODUCT INCLUDES:
 ANCHOR BOLTS WITH HARDWARE AND FOOTING TEMPLATE
 SPRAY NOZZLES
 WINTER NOZZLE CAPS
 SERVICE TOOLS
 TAMPER RESISTANT HARDWARE
- 4- BOND COMPONENT WITH #6 BARE COPPER WIRE
- 5- PRODUCT COMPLIANCE: MEETS ADA ACCESSIBILITY GUIDELINES MEETS CURRENT ASTM F1487 SAFETY STANDARDS

NIRBO				
AQUATIC INC.				

A




ALL INFORMATION CONTAINED IN THIS DOCUMENT IS PROPERTY OF NIRBO AQUATIC INC. AND MAY NOT BE REPRODUCED OR COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.


DATE (yyyy.mm.dd)				
2013.11.29		LARGE	GROUND	SPRAY
UNIT	SHEET	DRAWING NO		

2

ı

В



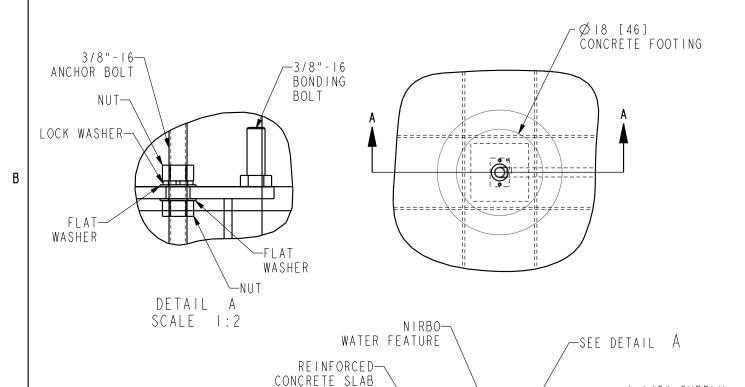

GROUND LEVEL GROUND LEVEL LINE (BY OTHERS). COMPACTED GRANULAR UNDISTURBED SOIL SECTION A - A CONCRETE FOOTING CONCRETE PAD

NOTES:

A

- I- FOLLOW LOCAL CODES, WHEREVER APPLICABLE.
- 2- GRANULAR BASE THICKNESS SHALL MEET LOCAL BUILDING CODE REQUIREMENTS.
- 3- WATER SUPPLY LINE SHALL BE INSTALLED PER LOCAL BUILDING CODES.
- 4- HARDWARE SUPPLIED BY MANUFACTURER SHALL BE USED.

NIRBO AQUATIC INC.	IN THIS DOCUMENT IS PROPERTY	DATE (yyyy.mm.dd) 2013.10.21	INSTALLATION, GROUND FEATURE		
	COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.	UNIT INCH [CM]	SHEET /	DRAWING NO 0 3 0 0 8 - 2 3	REV O

2

ı