




Nirbo water features are made from high quality stainless steel and engineering plastics materials, therefore they are very durable and have excellent fun factor. There are over one hundred different water features to choose from, this product is just a great example. We use brass or stainless steel nozzles which are ideal materials for the application.

Liquid Sprout | 03167

GPM	PSI	LPM	Bar
12	5	48	0.35
Width	Length	Height	
4" (10 cm)	7" (18 cm)	6" (16 cm)


Nirbo Aquatic Inc.





В


Α




В

1

FOR FOOTING DETAILS SEED DRAWING NO: 03008-23



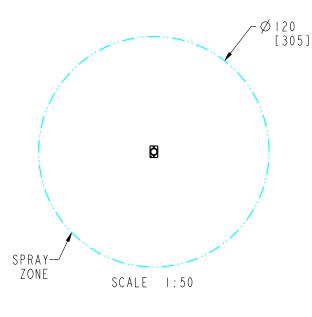

FLOW RATE AT 5 PSI	LOW	NORMAL	HIGH
GPM-[LPM]	8[32]	12[48]	18[72]

- I- STRUCTURE: TYPE 304 STAINLESS STEEL NOZZLE: BRASS WITH TAMPER RESISTANT FEATURES
- 2- FINISH: NO COATING
- 3- PRODUCT INCLUDES:
 ANCHOR BOLTS WITH HARDWARE AND FOOTING
 TEMPLATE, NOZZLES, WINTER NOZZLE CAPS, SERVICE
 TOOLS & TAMPER RESISTANT HARDWARE
- 4- BOND COMPONENT WITH #6 BARE COPPER WIRE
- 5- PRODUCT COMPLIANCE:
 MEETS ADA ACCESSIBILITY GUIDELINES
 MEETS CURRENT ASTM F1487 SAFETY STANDARDS

NIRBO
AQUATIC INC.


ALL INFORMATION CONTAINED IN THIS DOCUMENT IS PROPERTY OF NIRBO AQUATIC INC. AND MAY NOT BE REPRODUCED OR COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.


DATE (yyyy.mm.dd)			
2013.11.29		LIQUID SPROUT	
UNIT	SHEET	DRAWING NO	REV
INCH			
[C M]	1/2	03167-01-D15	0

2

ı

В



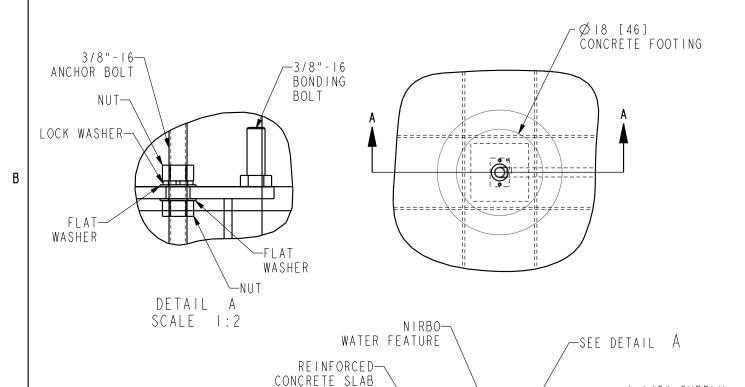

GROUND LEVEL GROUND LEVEL LINE (BY OTHERS). COMPACTED GRANULAR UNDISTURBED SOIL SECTION A - A CONCRETE FOOTING CONCRETE PAD

NOTES:

A

- I- FOLLOW LOCAL CODES, WHEREVER APPLICABLE.
- 2- GRANULAR BASE THICKNESS SHALL MEET LOCAL BUILDING CODE REQUIREMENTS.
- 3- WATER SUPPLY LINE SHALL BE INSTALLED PER LOCAL BUILDING CODES.
- 4- HARDWARE SUPPLIED BY MANUFACTURER SHALL BE USED.

NIRBO AQUATIC INC.	IN THIS DOCUMENT IS PROPERTY	DATE (yyyy.mm.dd) 2013.10.21	INSTALLATION, GROUND FEATURE		
	COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.	UNIT INCH [CM]	SHEET /	DRAWING NO 0 3 0 0 8 - 2 3	REV O

2

ı