




Nirbo water features are made from high quality stainless steel and engineering plastics materials, therefore they are very durable and have excellent fun factor. There are over one hundred different water features to choose from, this product is just a great example. We use brass or stainless steel nozzles which are ideal materials for the application.


Slant Jets | 03211

GPM	Max PSI	LPM	Max Bar
12	5	48	0.35
Width	Length	Height	
4" (10 cm)	7" (18 cm)	6" (16 cm)


Nirbo Aquatic Inc.





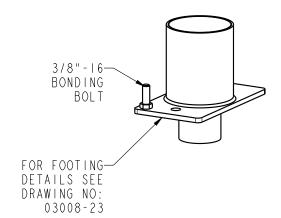

Ι



В

Α

 FLOW RATE AT 5 PSI
 LOW
 NORMAL
 HIGH

 GPM-[LPM]
 8[32]
 12[48]
 18[72]

NOZZLE: BRASS WITH TAMPER RESISTANT FEATURES

I- STRUCTURE: TYPE 304 STAINLESS STEEL

2- FINISH: NO COATING

3- PRODUCT INCLUDES:
ANCHOR BOLTS WITH HARDWARE AND FOOTING TEMPLATE
SPRAY NOZZLES
WINTER NOZZLE CAPS
SERVICE TOOLS
TAMPER RESISTANT HARDWARE

4- BOND COMPONENT WITH #6 BARE COPPER WIRE

5 DRADUAT ANNAL LANGE

5- PRODUCT COMPLIANCE:
MEETS ADA ACCESSIBILITY GUIDELINES
MEETS CURRENT ASTM F1487 SAFETY STANDARDS

R24 [61] SPRAY ZONE SCALE 1:50

120

[305]

NIRBO AQUATIC INC.

	\Box
\bigcirc	

ALL INFORMATION CONTAINED IN THIS DOCUMENT IS PROPERTY OF NIRBO AQUATIC INC. AND MAY NOT BE REPRODUCED OR COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.

DATE (yyyy.mm.dd)			
2013.11.29		SLANT JETS	
UNIT	SHEET	DRAWING NO	REV
INCH			
[M]	1/2	03211-01-015	01


2


ı

Α

В

В



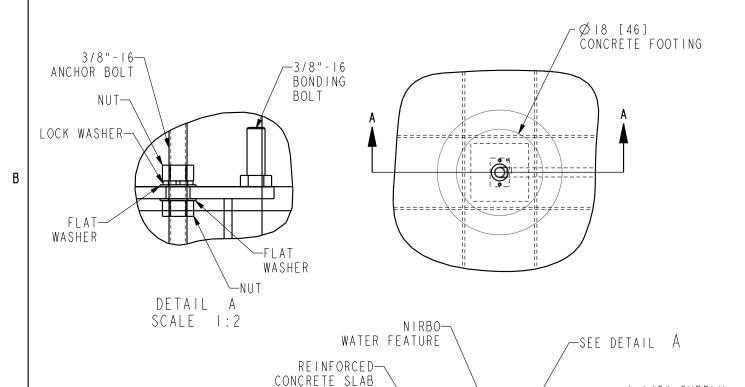

GROUND LEVEL GROUND LEVEL LINE (BY OTHERS). COMPACTED GRANULAR UNDISTURBED SOIL SECTION A - A CONCRETE FOOTING CONCRETE PAD

NOTES:

A

- I- FOLLOW LOCAL CODES, WHEREVER APPLICABLE.
- 2- GRANULAR BASE THICKNESS SHALL MEET LOCAL BUILDING CODE REQUIREMENTS.
- 3- WATER SUPPLY LINE SHALL BE INSTALLED PER LOCAL BUILDING CODES.
- 4- HARDWARE SUPPLIED BY MANUFACTURER SHALL BE USED.

NIRBO AQUATIC INC.	IN THIS DOCUMENT IS PROPERTY	DATE (yyyy.mm.dd) 2013.10.21	INSTALLATION, GROUND FEATURE		
	COMMUNICATED WITHOUT PERMISSION IN WRITING FROM NIRBO AQUATIC INC.	UNIT INCH [CM]	SHEET /	DRAWING NO 0 3 0 0 8 - 2 3	REV O

2

ı