




Nirbo water features are made from high quality stainless steel material, are very durable and have excellent fun factor. There are over one hundred different water features to choose from, this product is just a great example. We use brass or stainless steel nozzles which are ideal materials for the application.



Mix Trio | 03204

GPM	PSI	LPM	Bar
24	10	96	0.7
Width	Length	Height	
55" (140 cm)	62" (157 cm)	136" (345 cm)	


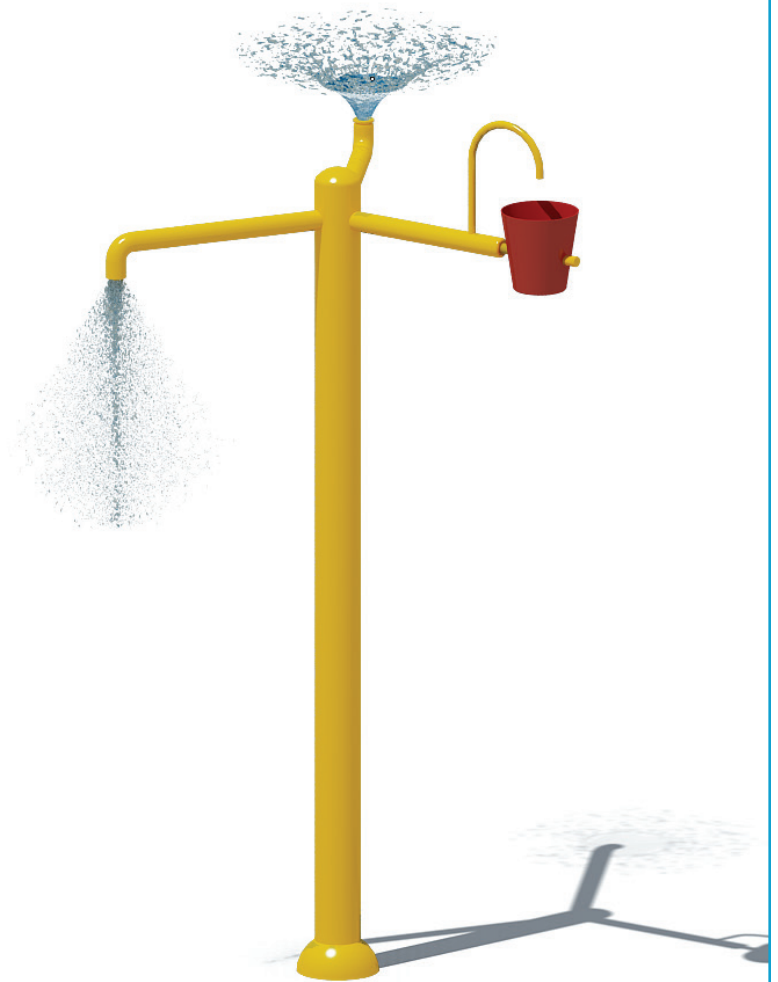


Nirbo Aquatic Inc.

2430 Lucknow Drive, unit 14, Mississauga, ON L5S 1V3, Canada
Toll Free: 1.888.68.NIRBO (64726) | Tel: 1.905.766.4474 | Fax: 1.905.766.4467
Website: www.nirbo.com | Email: info@nirbo.com

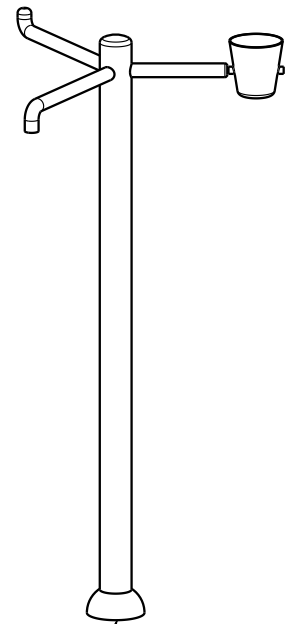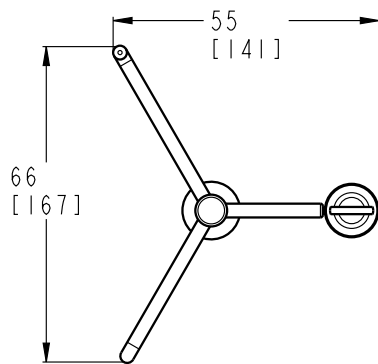

FOR FOOTING DETAILS
SEE DRAWING NO:
03008-32

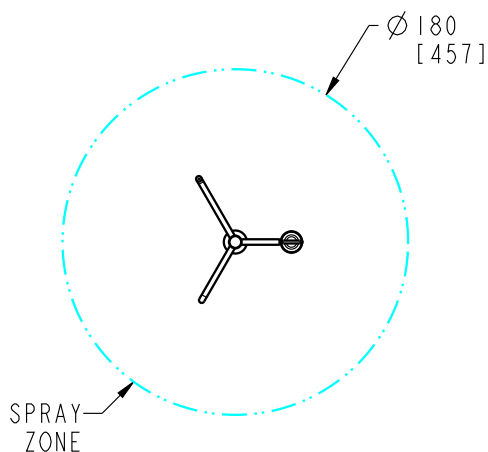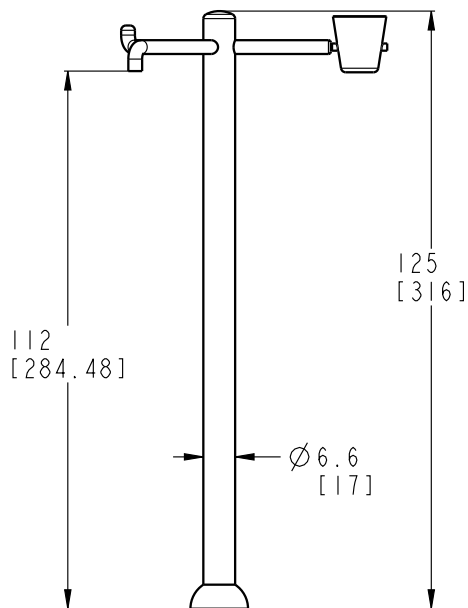

FLOW RATE AT 5 PSI	LOW	NORMAL	HIGH
GPM-[LPM]	17[68]	24[96]	36[144]

- 1- STRUCTURE: TYPE 304 STAINLESS STEEL
NOZZLE: BRASS WITH TAMPER RESISTANT FEATURES
BEARINGS: BRONZE
BUCKET: FRP
- 2- FINISH: UV RESISTANT POLYESTER POWDER COATING
- 3- PRODUCT INCLUDES:
ANCHOR BOLTS WITH HARDWARE AND FOOTING
TEMPLATE, NOZZLES, WINTER NOZZLE CAPS, SERVICE
TOOLS & TAMPER RESISTANT HARDWARE
- 4- GROUND COMPONENT WITH #6 BARE COPPER WIRE
- 5- PRODUCT COMPLIANCE:
MEETS ADA ACCESSIBILITY GUIDELINES
MEETS CURRENT ASTM F1487 SAFETY STANDARDS

**NIRBO
AQUATIC INC.**

ALL INFORMATION CONTAINED
IN THIS DOCUMENT IS PROPERTY
OF NIRBO AQUATIC INC. AND
MAY NOT BE REPRODUCED OR
COMMUNICATED WITHOUT
PERMISSION IN WRITING FROM
NIRBO AQUATIC INC.

DATE
(yyyy.mm.dd)

2013.11.14

UNIT
INCH
[CM]

MIX TRIO
SURFACE MOUNTED

SHEET

1/2

DRAWING NO

03204-02-D15

REV

01

B

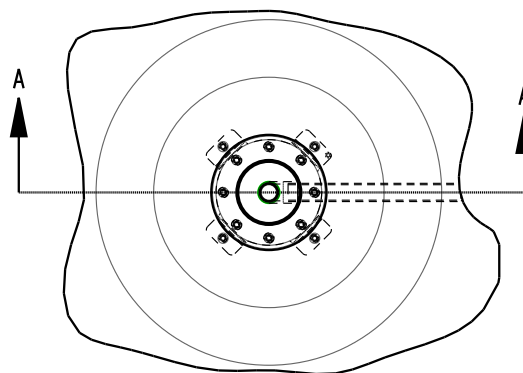


Diagram illustrating the cross-section of a wellhead assembly, showing the connection between the wellhead and the ground level. The assembly is mounted on a reinforced concrete footing, which is embedded in undisturbed soil. The wellhead is connected to a 1-1/2" female NPT connection, which is further connected to a 1-1/2" supply line (by others). The wellhead is protected by a toe guard. The ground level is indicated, and the assembly is surrounded by compacted granular material. The wellhead is labeled as a Nirbo Aquatic Spray Feature. Dimensions are provided in inches and millimeters.

Labels and Dimensions:

- NIRBO AQUATIC SPRAY FEATURE
- TOE GUARD
- 1-1/2" FEMALE NPT CONNECTION
- 1-1/2" SUPPLY LINE (BY OTHERS)
- GROUND LEVEL
- REINFORCED CONCRETE
- COMPACTED GRANULAR
- 6 [152]
- 12 [305]
- 18 [457]
- 24 [610]
- SEE DETAIL A
- REINFORCED CONCRETE FOOTING
- UNDISTURBED SOIL

A

A

- A

01